


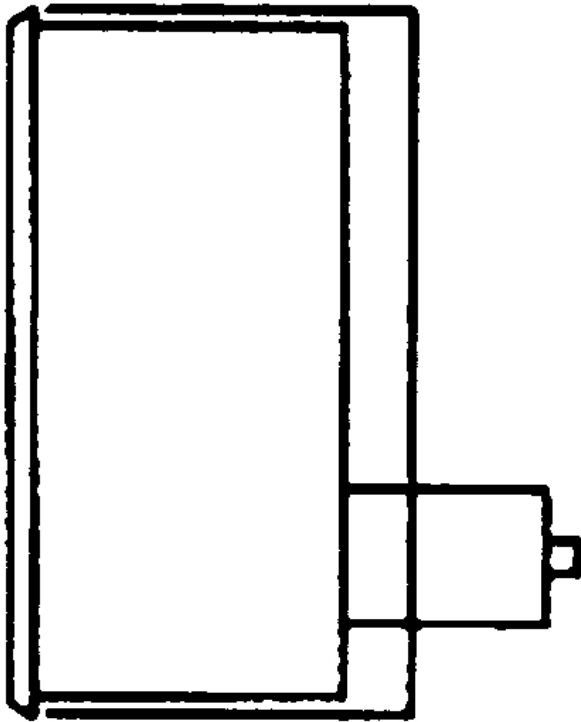

## Bourdon tube pressure gauges for chemical applications RF50ChGly

Part no. 85060752

Bourdon tube pressure gauge for chemical applications type D7 with glycerine filling

### benefits

- for chemical and process engineering applications
- measuring system fully welded to housing
- extremely robust design
- can be used in case of heavy vibrations and high, dynamic pressure loads
- tightness-tested with helium
- DNV- and GOSSTANDART-certified
- Ex version (optional)

### Application

For corrosive gaseous and liquid media which are not highly viscous and do not crystallise; suitable for corrosive environments. For measurements in areas with high vibration levels and high, dynamic pressure loads.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

### Technical Specifications

**Type**  
D7

**Nominal size**  
50

**accuracy class (EN 837-1/6)**  
1.6

**ranges (EN 837-1/5)**  
see ordering table

**application area**  
static load:  $\frac{3}{4}$  x full scale value  
dynamic load:  $\frac{2}{3}$  x full scale value  
short-term: Full scale value

**Operating temperature range**  
Medium: max. 100 °C  
Ambient: -20/+60 °C

**Temperature performance**  
Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:  
at rising temperature approx.  $\pm 0.4 \text{ } \%$ /10 K  
falling temperature approx.  $\pm 0.4 \text{ } \%$ /10 K  
of full scale value

**Degree of protection**  
IP 54 (EN 60529) with housing vent (< 25 bar)

### standard version

#### Connection

Stainless steel 316 L, bottom back

#### Measuring element

Bourdon tube, stainless steel 316 Ti/316 L

≤ 60 bar: "C" type tube

> 60 bar: helical tube

tightness-tested with helium

#### movement

Stainless steel

#### Dial

Aluminium, white

Scaling: black

#### Pointer

Aluminium, black

#### Housing

Stainless steel 304, with blow-out

#### bayonet bezel

NG 50

#### crimped bezel

Stainless steel 304

#### window

NG 50

Plastic

#### filling liquid


glycerine (99.5 %)

### Options

- Filling liquid silicone oil
- plastic window (NG 63)
- Back flange (NG 63)
- clamp fixing
- Ex version
- Crimped bezel, polished
- special scales
- other process connections

### Technical Drawings

**NG 50 – bottom back connection, with clamp fixing**

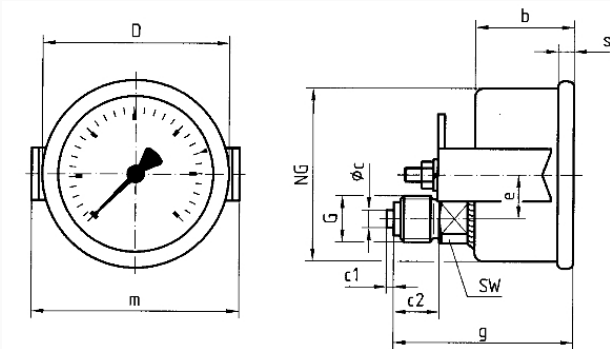

**Dimensions (mm)**

| NG | b  | Øc | c1 | c2 | D  | e    | G       | g  | m  | s   | SW |
|----|----|----|----|----|----|------|---------|----|----|-----|----|
| 50 | 28 | 5  | 2  | 13 | 53 | 12,5 | G 1/4 B | 51 | 59 | 4,5 | 14 |

Versions

| Range   | Mounting type | Type              |                                                                                     | Part number |
|---------|---------------|-------------------|-------------------------------------------------------------------------------------|-------------|
| 0/1 bar | clamp fixing  | RF50ChGly<br>D752 |  | 85060752    |

-  in-stock items
-  Non-stock items