



Standard capsule pressure gauges KP63Dif

Part no. 35516911

Standard capsule pressure gauges for differential pressure type D9

benefits

- Measurement of extremely small differential pressures
- robust design
- static pressures up to 400 mbar
- direct indication of the differential pressure
- many customised versions available

Application

For differential pressure measurement of non-corrosive, gaseous, dry media. Especially suitable for filter loss measurement in air conditioning and ventilation applications.

! For measuring gas or vapour, observe the table "Selection Criteria as per EN 837-2" (see appendix)!

Technical Specifications

Type

D9

Nominal size

63

Function

The "plus" pressure (= high pressure) is applied to the inside of the diaphragm. The "minus" pressure (= low pressure) is applied to the inside of the pressure-tight housing. The pressure difference causes the diaphragm to change its shape, thus generating the movement required to measure the pressure. This displacement is picked up by the movement. The differential pressure is directly indicated by a pointer.

accuracy class (EN 837-3/6)

1.6

ranges (EN 837-3/5)

see ordering table

application area

static load: Full scale value

dynamic load: 0.9 x full scale value

Overpressure safety

Full scale value

maximum static pressure

400 mbar

Operating temperature range

Medium: max. 60 °C

Ambient: -20/+60 °C

Temperature performance

Indication error when the temperature of the measuring system deviates from the normal temperature of 20 °C:

at rising temperature approx. ± 0.6 %/10 K

falling temperature approx. ± 0.6 %/10 K

of full scale value

Degree of protection

IP 66 (EN 60529)

Connection

Brass, centre back, parallel, below each other

Measuring element (wetted part)

Capsule element, CuBe alloy

Movement (wetted part)
Brass

Zero correction
from the front

Seal (wetted part)
NBR (Perbunan)

Dial (wetted part)
Aluminium, black
Scaling: black

Pointer (wetted part)
Aluminium, black

Housing (wetted part)
Stainless steel 304

bayonet bezel
Stainless steel 304


Window (wetted part)
Plastic (PMMA)

Options

- back flange
- 3-hole fixing, panel mounting bezel
- hose connections
- special scales
- other process connections

Technical Drawings

NG 63 – centre back connection

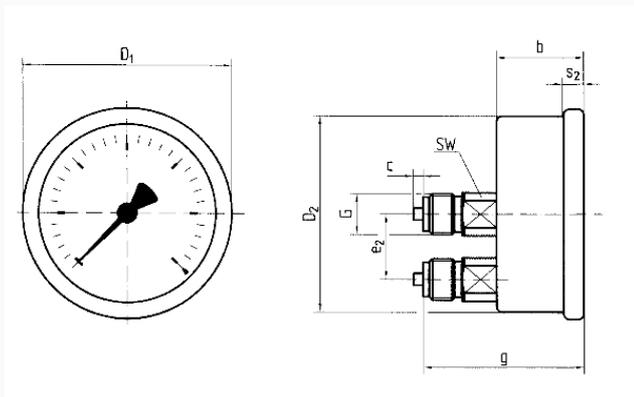

Dimensions (mm)

NG	b	c	D1	D2	e2	g	G	s2	SW
63	30,5	2	68	62	20	53	G¼B	6	14

Versions

		housing ø	Housing	accura- cy class	Connec- tion	Ausrich- tung	Range	Type		Part no.
KP63Dif	D911	63 mm	Stain- less steel 304	1.6	2 x G¼B		0/25 mbar	KP63Dif D911	●	35516911

● in-stock items

● Non-stock items